



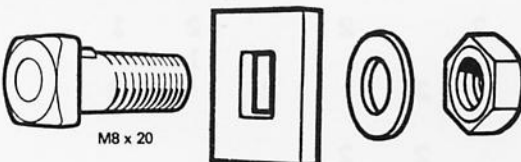

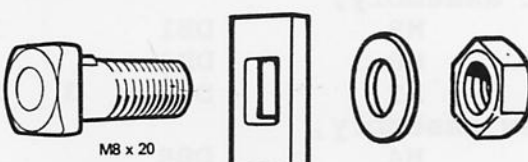

The fixings required for Dorlec frameworks are limited to a few standard combinations that are available in kit form under "DB" numbers, as detailed below.

<p>DB1 30 SERIES</p>  <p>M8 x 20</p>	<p>DB2 22½° & 30° CROSS MBRS</p>  <p>M8 x 20</p>
<p>DB3 20 SERIES</p>  <p>M5 x 14</p>	<p>DB4 INSERTABLE - 30 SERIES</p>  <p>M8 x 21</p>
<p>DB5 INSERTABLE - 20 SERIES</p>  <p>M5 x 15</p>	<p>DB7 WITH DLH 832 - M4 x 12 MEMBER - STEEL COMPONENT DB8 WITH DLH 833 M4 x 16 MEMBER - CAST COMPONENT</p> 

STAINLESS STEEL CRINKLE WASHERS, PLATED



- DLH 377 M4
- DLH 378 M5
- DLH 379 M6
- DLH 380 M8

SHAKE PROOF WASHERS



TAPTITE SCREW

"Thread forming screws" have been specified for the fixing of certain components. These are available under the trade mark "Taptite": the ends resemble a thread forming tap, which cuts a standard thread when fitted. For satisfactory results the given diameters of the fixing holes should be carefully maintained.



END VIEW

